



Experience the Performance • Discover the Value

# PASSENGER AND LIGHT TRUCK PRODUCT GUIDE 2010

STAY IN CONTROL WITH OUR NEW **Y** RATED TIRE





# Table of Contents

	Page
<b>Passenger Car</b>	
CHAMPIRO HPY	2
CHAMPIRO 328	4
CHAMPIRO BAX 2	6
CHAMPIRO 228	8
MAXTOUR	10
CHAMPIRO 128	12
CHAMPIRO 60/65/70/75	14
WINGRO	15
<b>SUV &amp; Light Truck</b>	
CHAMPIRO 528	16
SAVERO HT PLUS	18
SAVERO A/T PLUS	20
ADVENTURO A/T II	22
ADVENTURO M/T	24
<b>Winter</b>	
CHAMPIRO ICEPRO	26
Warranties and Roadside Assistance	28
Designations, Load, and Speed index	30

STAY IN CONTROL WITH OUR NEW **Y** RATED TIRE

4000

5000

ULTRA HIGH PERFORMANCE  
ASYMMETRICAL

# CHAMPIRO HPY



- 17 – 20 Inch
- Speed Rating: Y
- 35 – 50 Series
- UTQG: 300AAA

## Features

New asymmetrical pattern design

Solid center rib

Four wide longitudinal grooves

Full Silica

## Benefits

- ▶ Outstanding cornering on wet and dry surfaces. Low noise level at high speeds
- ▶ Straight line stability and steering response
- ▶ Efficient water evacuation preventing aquaplaning
- ▶ Enhanced grip on wet surfaces



Refer to page 28 for warranty details



Low Rolling Noise



ULTRA HIGH PERFORMANCE ASYMMETRICAL



**CHAMPIRO HPY**

**Size Range**

AR	Tire Size	LI	SR	UTQG	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
<b>35</b>	265/35ZR18 XL	97	Y	300AAA	9.5	9.0-10.5	1609	730	49	340	10.0	7.8	25.7	653	10.6	271	BSW
	225/35ZR19 XL	88	Y	300AAA	8.0	7.5 - 9.0	1235	560	49	340	10.0	7.8	25.2	641	9.1	230	BSW
	235/35ZR19 XL	91	Y	300AAA	8.5	8.0 - 9.5	1356	615	49	340	10.0	7.8	25.5	647	9.5	241	BSW
	255/35ZR19 XL	96	Y	300AAA	9.0	8.5 - 10.0	1565	710	49	340	10.0	7.8	26.0	661	10.2	260	BSW
	255/35ZR20 XL	97	Y	300AAA	9.0	8.5 - 10.0	1609	730	49	340	10.0	7.8	27.0	686	10.2	260	BSW
<b>40</b>	245/40ZR17 XL	95	Y	300AAA	8.5	8.0 - 9.5	1521	690	49	340	10.0	7.8	24.7	628	9.8	248	BSW
	225/40ZR18 XL	92	Y	300AAA	8.0	7.5 - 9.0	1389	630	49	340	10.0	7.8	25.1	637	9.1	230	BSW
	235/40ZR18 XL	95	Y	300AAA	8.5	8.0 - 9.5	1521	690	49	340	10.0	7.8	25.4	645	9.5	241	BSW
	255/40ZR19	96	Y	300AAA	9.0	8.5 - 10.0	1565	710	44	300	10.0	7.8	27.0	687	10.2	260	BSW
<b>45</b>	215/45ZR17 XL	91	Y	300AAA	7.0	7.0 - 8.0	1356	615	49	340	10.0	7.8	24.6	626	8.4	213	BSW
	225/45ZR17 XL	94	Y	300AAA	7.5	7.0 - 8.5	1477	670	49	340	10.0	7.8	25.0	634	8.9	225	BSW
	235/45ZR17 XL	97	Y	300AAA	8.0	7.5 - 9.0	1609	730	49	340	10.0	7.8	25.4	644	9.3	236	BSW
	225/45ZR18	91	Y	300AAA	7.5	7.0 - 8.5	1356	615	44	300	10.0	7.8	25.9	659	8.9	225	BSW
	255/45ZR18 XL	103	Y	300AAA	8.5	8.0 - 9.5	1929	875	49	340	10.0	7.8	27.0	687	10.0	255	BSW
<b>50</b>	235/50ZR18 XL	101	Y	300AAA	7.5	6.5 - 8.5	1819	825	49	340	10.0	7.8	27.3	693	9.6	245	BSW

LI Load Index    SR Speed Rating    BSW Black Side Wall



The CHAMPIRO HPY has an asymmetrical pattern design consisting of an inner and outer shoulder area

The open inner shoulder with its continuous lateral grooves disperses water efficiently, providing excellent protection against aquaplaning



Compact outer shoulder ensures optimum road contact and excellent cornering stability



# ULTRA HIGH PERFORMANCE



## CHAMPIRO 328

Directional V-shape design for outstanding high speed handling performance



- 15 - 20 Inch
- Speed Rating: H - W
- 30 - 55 Series
- UTQG: 280AAA - 460AA

### Features

V-shaped tread design and two wide circumferential grooves

Optimized variable pitch tread design

Circumferential center rib

Rim protector

### Benefits

- ▶ Efficient water evacuation delivering outstanding wet handling performance
- ▶ Quiet and smooth ride under high speed driving conditions
- ▶ Enhanced lateral traction
- ▶ Protects wheels from curb damage



Refer to page 28 for warranty details



# ULTRA HIGH PERFORMANCE

# CHAMPIRO 328



## Size Range

AR	Tire Size	LI	SR	UTQG	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
30	265/30ZR19	93	W	280AAA	9 1/2J	9J;10J	1433	650	49	340	11	8.2	25.3	643	10.7	271	BSW
	275/30ZR19	96	W	280AAA	9 1/2J	9J;10J	1565	710	49	340	11	8.2	25.6	649	10.9	278	BSW
35	215/35ZR18	84	W	280AAA	7 1/2J	7J;8J	1102	500	49	340	10	8.1	23.9	607	8.6	218	BSW
	255/35ZR18	94	W	280AAA	9J	8 1/2J;9 1/2J	1477	670	49	340	11	8.4	25.0	635	10.2	260	BSW
	265/35ZR18	97	W	280AAA	9 1/2J	9J;10J	1609	730	49	340	11	8.4	25.3	643	10.7	271	BSW
	235/35ZR19	91	W	280AAA	8 1/2J	8J;9J	1356	615	49	340	11	8.2	25.5	647	9.5	241	BSW
	245/35ZR19	93	W	280AAA	8 1/2J	8J;9J	1433	650	49	340	11	8.3	25.8	655	9.8	248	BSW
	245/35ZR20	95	W	280AAA	8 1/2J	8J;9J	1521	690	49	340	11	8.3	26.8	680	9.8	248	BSW
	255/35ZR20	97	W	280AAA	9J	8 1/2J;9 1/2J	1609	730	49	340	11	8.4	27.0	686	10.2	260	BSW
40	215/40ZR16	86	W	280AAA	7 1/2J	7J;8J;8 1/2J	1168	530	49	340	10	8.1	22.8	578	8.6	218	BSW
	205/40ZR17	84	W	280AAA	7 1/2J	7J;8J	1102	500	49	340	10	8.0	23.5	596	8.3	212	BSW
	215/40ZR17	87	W	280AAA	7 1/2J	7J;8J;8 1/2J	1202	545	49	340	10	8.1	23.8	604	8.6	218	BSW
	245/40ZR17	91	W	280AAA	8 1/2J	8J;9J	1356	615	44	300	11	8.3	24.7	628	9.8	248	BSW
	225/40ZR18	92	W	280AAA	8J	7 1/2J;8 1/2J	1389	630	49	340	10	8.1	25.1	637	9.1	230	BSW
	235/40ZR18	95	W	280AAA	8 1/2J	8J;9J	1521	690	49	340	11	8.2	25.4	645	9.5	241	BSW
	245/40ZR18	97	W	280AAA	8 1/2J	8J;9J	1609	730	49	340	11	8.3	25.7	653	9.8	248	BSW
45	195/45ZR15	78	W	280AAA	6 1/2J	6J;7J	937	425	44	300	10	7.9	21.9	557	7.7	195	BSW
	215/45ZR17	91	W	280AAA	7J	7 1/2J;8J	1356	615	49	340	10	8.1	24.6	626	8.4	213	BSW
	225/45ZR17 XL	94	W	280AAA	7 1/2J	7J;8J	1477	670	49	340	10	8.1	25.0	634	8.9	225	BSW
	235/45ZR17 XL	97	W	280AAA	8J	7 1/2J;8 1/2J	1609	730	49	340	11	8.2	25.4	644	9.3	236	BSW
	245/45ZR17	99	W	280AAA	8J	7 1/2J;8 1/2J	1709	775	49	340	11	8.3	25.7	652	9.6	243	BSW
	245/45ZR18	100	W	280AAA	8J	7 1/2J;8 1/2J	1764	800	49	340	11	8.3	26.7	677	9.6	243	BSW
	255/45ZR18	103	W	280AAA	8 1/2J	8J;9J	1929	875	49	340	11	8.4	27.0	687	10	255	BSW
50	205/50R15	86	H	460AA	6 1/2J	6J;7J	1168	530	36	250	10	8.0	23.1	587	8.4	214	BSW
	195/50R16	88	V	280AAA	6J	5 1/2J;6 1/2J	1235	560	49	340	10	7.9	23.7	602	7.9	201	BSW
	205/50R16	87	H	460AA	6 1/2J	6J;7J	1202	545	36	250	10	8.0	24.1	612	8.4	214	BSW
55	195/55R15	85	H	460AA	6J	5 1/2J;6 1/2J	1135	515	36	250	10	7.9	23.4	595	7.9	201	BSW
	205/55R15	88	H	460AA	6 1/2J	6J;7J	1235	560	36	250	10	8.0	23.9	607	8.4	214	BSW
	205/55R16	91	H	460AA	6 1/2J	6J;7J	1356	615	36	250	10	8.0	24.9	632	8.4	214	BSW
	225/55ZR16	99	W	280AAA	7J	6 1/2J;7 1/2J	1709	775	49	340	10	8.1	25.7	654	9.2	233	BSW

LI Load Index    SR Speed Rating    BSW Black Side Wall

ASYMMETRICAL TOURING

# CHAMPIRO BAX 2

Delivers excellent control, comfort, and pleasure in different driving conditions



15 - 16 Inch

Speed Rating: H - W

50 - 65 Series

UTQG: 360AA

Full Silica

### Features

Asymmetrical tread design

Full Silica Compound

Wide circumferential grooves

### Benefits

▶ Excellent stability, cornering and a quiet ride

▶ Optimum wet handling and low rolling resistance

▶ Optimum water evacuation



Refer to pages 28 & 29 for details



# ASYMMETRICAL TOURING

# CHAMPIRO BAX 2



## Size Range

AR	Tire Size	LI	SR	UTQG	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
50	195/50R15	82	H	360AA	6.0	5.5 - 7.0	1047	475	44	300	10	8.0	22.7	577	7.9	201	BSW
	205/50R15	86	V	360AA	6.5	5.5 - 7.5	1168	530	44	300	10	8.0	23.1	587	8.4	214	BSW
	205/50R16	87	V	360AA	6.5	5.5 - 7.5	1201	545	44	300	10	8.0	24.1	612	8.4	214	BSW
55	185/55R14	80	H	360AA	6.0	5.0 - 6.5	992	450	44	300	10	7.8	22.0	560	7.6	194	BSW
	185/55R15	82	V	360AA	6.0	5.0 - 6.5	1047	475	44	300	10	7.8	23.0	585	7.6	194	BSW
	195/55R15	85	V	360AA	6.0	5.5 - 7.0	1135	515	44	300	10	8.0	23.4	595	7.9	201	BSW
	205/55R15	88	V	360AA	6.5	5.5 - 7.5	1235	560	44	300	11	8.2	23.9	607	8.4	214	BSW
	205/55R16	91	V	360AA	6.5	5.5 - 7.5	1356	615	44	300	10	8.0	24.9	632	8.3	210	BSW
	215/55R16	93	V	360AA	7.0	6.0 - 7.5	1433	650	44	300	11	8.3	25.3	642	8.9	226	BSW
60	195/60R15	88	V	360AA	6.0	5.5 - 7.0	1235	560	44	300	10	8.1	24.2	615	7.9	201	BSW
	205/60R15	91	V	360AA	6.0	5.5 - 7.5	1356	615	44	300	11	8.2	24.7	627	8.2	209	BSW
	225/60R15	96	V	360AA	6.5	6.0 - 8.0	1565	710	44	300	11	8.4	25.6	651	9.0	228	BSW
	205/60R16	92	V	360AA	6.0	5.5 - 7.5	1389	630	44	300	11	8.2	25.7	652	8.2	209	BSW
	215/60R16	95	V	360AA	6.5	6.0 - 7.5, 6J;7J	1521	690	44	300	11	8.3	26.1	664	8.7	221	BSW
	225/60R16	98	V	360AA	6.5	6.0 - 8.0	1653	750	44	300	11	8.4	26.6	676	9.0	228	BSW
65	195/65R15	91	V	360AA	6.0	5.5 - 7.0	1356	615	44	300	10	8.1	25.0	635	7.9	201	BSW


LI Load Index    SR Speed Rating    BSW Black Side Wall

# PERFORMANCE TOURING



## CHAMPIRO 228

Designed for low noise and comfort, this Performance Touring tire delivers low rolling resistance for enhanced fuel economy and extraordinary grip in wet and dry conditions.



14 – 18 Inch

Speed Rating: H - V

50 – 65 Series

UTQG: 320AA - 380AA

### Features

NANOTEK Silica Compound

Four wide circumferential grooves

Extended shoulder grooves

Advanced tread design

Produced with Non-Aromatic oils

### Benefits

- ▶ Reduced rolling resistance and exceptional grip in wet and dry conditions
- ▶ Efficient water evacuation and outstanding wet performance
- ▶ Excellent cornering
- ▶ Quiet and comfortable ride
- ▶ Greener manufacturing process



Refer to pages 28 & 29 for details



# PERFORMANCE TOURING

## CHAMPIRO 228



### Size Range

AR	Tire Size	LI	SR	UTQG	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
50	195/50R15	82	V	320AA	6J	5 1/2J;6J;7J	1047	475	44	300	10	7.9	22.7	577	7.9	201	BSW
	205/50R16	87	V	380AA	6 1/2J	5 1/2J;6J;7J	1202	545	44	300	10	8.0	24.1	612	8.1	205	BSW
	225/50R17	94	V	320AA	7J	6J;6 1/2J; 7 1/2J	1477	670	44	300	10	8.1	25.9	658	8.9	225	BSW
	235/50R17	96	V	320AA	7 1/2J	6 1/2J;7J; 8J;8 1/2J	1565	710	44	300	11	8.2	26.3	668	9.3	235	BSW
55	185/55R14	80	H	380AA	6J	5J;5 1/2J; 6 1/2J	992	450	44	300	10	7.8	22.0	560	7.6	194	BSW
	185/55R15	82	V	320AA	6J	5J;5 1/2J;6 1/2J	1047	475	44	300	10	7.8	23.0	585	7.6	194	BSW
	195/55R15	85	V	320AA	6J	5 1/2J;6J;6 1/2J	1135	515	44	300	10	7.9	23.4	595	7.9	201	BSW
	195/55R16	87	V	320AA	6J	5 1/2J;6 1/2J	1356	615	50	340	10	7.6	24.4	620	7.7	195	BSW
	205/55R16	91	H	380AA	6 1/2J	5 1/2J;6J; 7J;7 1/2J	1356	615	44	300	10	8.0	24.9	632	8.1	205	BSW
	205/55R16	91	V	320AA	6 1/2J	5 1/2J;6J; 7J;7 1/2J	1356	615	44	300	10	8.0	24.9	632	8.1	205	BSW
	215/55R16	93	V	320AA	7J	6J;6 1/2J; 7 1/2J	1433	650	44	300	10	8.1	25.3	642	8.5	215	BSW
	225/55R16	95	V	320AA	7J	6 1/2J;7 1/2J;8J	1521	690	44	300	10	8.1	25.7	654	8.9	225	BSW
	215/55R17	94	V	320AA	7J	6J;6 1/2J;7 1/2J	1477	670	44	300	10	8.1	26.3	668	8.5	215	BSW
60	185/60R14	82	H	380AA	5 1/2J	5J;6J;6 1/2J	1047	475	44	300	10	7.8	22.8	578	7.4	189	BSW
	195/60R14	86	H	380AA	6J	5 1/2J; 6 1/2J;7J	1168	530	44	300	10	7.9	23.2	590	7.9	201	BSW
	185/60R15	84	H	380AA	5 1/2J	5J;6J	1102	500	44	300	10	7.7	23.7	603	7.4	189	BSW
	195/60R15	88	V	320AA	6J	5 1/2J;6J; 6 1/2J	1235	560	44	300	10	7.9	24.2	615	7.9	201	BSW
	205/60R15	91	V	320AA	6J	5 1/2J; 6 1/2J;7J	1356	615	44	300	10	8.0	24.7	627	8.2	209	BSW
	215/60R15	94	H	380AA	6 1/2J	6J;6 1/2J; 7J;7 1/2J	1477	670	44	300	10	8.1	25.2	639	8.7	221	BSW
	205/60R16	92	V	320AA	6J	5 1/2J; 6J;6 1/2J	1389	630	44	300	10	8.0	25.7	652	8.1	205	BSW
	215/60R16	95	V	320AA	6 1/2J	6J;6 1/2J;7J	1521	690	44	300	11	8.3	26.1	664	8.5	215	BSW
	225/60R16	98	V	320AA	6 1/2J	6J;7J;7 1/2J	1653	750	44	300	10	8.1	26.6	676	8.9	225	BSW
	225/60R18	100	V	320AA	6 1/2J	6J;7J;7 1/2J	1764	800	44	300	10	8.1	28.6	727	8.9	225	BSW
65	185/65R14	86	H	380AA	5 1/2J	5 J;6 1/2J;6J	1168	530	44	300	10	7.8	23.5	596	7.4	189	BSW
	185/65R15	88	H	380AA	5 1/2J	5 J;6 1/2J;6J	1235	560	44	300	10	7.8	24.4	621	7.4	189	BSW
	195/65R15	91	H	380AA	6J	5 1/2J;6J; 6 1/2J;7J	1356	615	44	300	10	7.9	25.0	635	7.9	201	BSW
	195/65R15	91	V	320AA	6J	5 1/2J;6 1/2J	1356	615	44	300	10	7.9	25.0	635	7.9	201	BSW
	205/65R15	94	V	320AA	6J	5 1/2J;6J; 6 1/2J	1477	670	44	300	10	8.0	25.5	647	8.1	205	BSW
	215/65R17	99	H	380AA	6 1/2J	6J;7J;7 1/2J	1709	775	44	300	10	8.1	28.0	712	8.5	215	BSW


LI Load Index    SR Speed Rating    BSW Black Side Wall

# PREMIUM TOURING

**8 0 0 0 0 MILE**  
Limited Warranty



## MAXTOUR

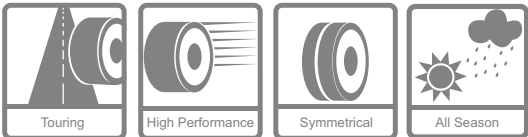

12 - 17 Inch      Speed Rating: T  
60 - 80 Series      UTQG: 620AB

### Features

- Advanced tread pattern
- Modern casing structure
- Enhanced tread compound

### Benefits

- ▶ Smooth, quiet, and reliable performance
- ▶ Consistent endurance and durability
- ▶ Extended tread life



Refer to pages 28 & 29 for details



# PREMIUM TOURING

## MAXTOUR



### Size Range


AR	Tire Size	LI	SR	UTQG	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
60	185/60R14	82	T	620AB	5 1/2J	5J;6J	1047	475	36	250	12	9.0	22.8	578	7.4	189	BSW
	195/60R14	86	T	620AB	6J	5 1/2J;6 1/2J	1168	530	36	250	12	9.1	23.2	590	7.9	201	BSW
	195/60R15	88	T	620AB	6J	5 1/2J;6 1/2J	1235	560	36	250	12	9.1	24.2	615	7.9	201	BSW
	205/60R15	91	T	620AB	6J	5 1/2J;6 1/2J	1356	615	36	250	12	9.2	24.7	627	8.2	209	BSW
	215/60R16	95	T	620AB	6 1/2J	6J;7J	1521	690	36	250	12	9.3	26.1	664	8.7	221	BSW
	225/60R16	98	T	620AB	6 1/2J	6J;7J	1653	750	36	250	12	9.4	26.6	676	9.0	228	BSW
	235/60R16	100	T	620AB	7J	6 1/2J;7 1/2J	1764	800	36	250	12	9.5	27.1	688	9.4	240	BSW
	215/60R17	96	T	620AB	6 1/2J	6 1/2J	1565	1565	36	250	12	9.3	27.5	690	9.5	241	BSW
	P225/60R17	98	T	620AB	6 1/2J	6J;7J;7 1/2J	1653	750	44	300	12	9.3	31.9	702	8.9	225	BSW
65	175/65R14	82	T	620AB	5J	5 1/2J;6J	1047	475	36	250	11	8.9	23.0	584	7.0	177	BSW
	185/65R14	86	T	620AB	5 1/2J	5J;6J	1168	530	36	250	12	9.0	23.5	596	7.4	189	BSW
	195/65R14	89	T	620AB	6J	5 1/2J;6 1/2J	1279	580	36	250	12	9.1	24.0	610	7.9	201	BSW
	185/65R15	88	T	620AB	5 1/2J	5J;6J	1235	560	36	250	12	9.0	24.4	621	7.4	189	BSW
	195/65R15	91	T	620AB	6J	5 1/2J;6 1/2J	1356	615	36	250	12	9.1	25.0	635	7.9	201	BSW
	205/65R15	94	T	620AB	6J	5 1/2J;6 1/2J	1477	670	36	250	12	9.2	25.5	647	8.1	205	BSW
	215/65R15	96	T	620AB	6 1/2J	6J;7J	1565	710	36	250	12	9.3	26.0	661	8.7	221	BSW
	215/65R16	98	T	620AB	6 1/2J	6J;7J	1653	750	36	250	12	9.3	27.0	686	8.7	221	BSW
	235/65R17	104	T	620AB	7J	6 1/2J;7 1/2J	1984	900	36	250	12	9.5	29.1	738	9.4	240	BSW
70	175/70R13	82	T	620AB	5.00B	5J;5.50B	1047	475	36	250	12	9.1	22.7	576	7.0	177	BSW
	185/70R13	86	T	620AB	5.50B	5 1/2J;6.00B	1168	530	36	250	12	9.2	23.2	590	7.4	189	BSW
	165/70R14	81	T	620AB	5J	5.00B;5 1/2J	1019	462	36	250	12	9.0	23.1	588	6.7	170	BSW
	185/70R14	88	T	620AB	5 1/2J	5J;6J	1235	560	36	250	12	9.2	24.3	616	7.4	189	BSW
	195/70R14	91	T	620AB	6J	5 1/2J;6 1/2J	1356	615	36	250	11	8.7	24.8	630	7.9	201	BSW
	205/70R14	95	T	620AB	6J	5 1/2J;6 1/2J	1521	690	36	250	11	8.8	25.4	644	8.2	209	BSW
	205/70R15	96	T	620AB	6J	5 1/2J;6 1/2J	1565	710	36	250	11	8.8	26.3	669	8.2	209	BSW
	205/70R15 WW	96	T	620AB	6J	5 1/2J;6 1/2J	1565	710	36	250	11	8.8	26.3	669	8.2	209	WW
	215/70R15	98	T	620AB	6 1/2J	6J;7J	1653	750	36	250	11	8.9	26.9	683	8.7	221	BSW
	215/70R15 WW	98	T	620AB	6 1/2J	6J;7J	1653	750	36	250	11	8.9	26.9	683	8.7	221	WW
	225/70R15	100	T	620AB	6 1/2J	6J;7J	1764	800	36	250	12	9.0	27.4	697	9.0	228	BSW
	235/70R15	103	T	620AB	7J	6 1/2J;7 1/2J	1929	875	36	250	12	9.1	28.0	711	9.4	240	BSW
	235/70R15 WW	103	T	620AB	7J	6 1/2J;7 1/2J	1929	875	36	250	12	9.1	28.0	711	9.4	240	WW
	225/70R16	102	T	620AB	6 1/2J	6J;7J	1874	850	36	250	12	9.0	28.4	722	9.0	228	BSW
	235/70R16	106	T	620AB	7J	6 1/2J;7 1/2J	2094	950	36	250	12	9.1	29.0	736	9.4	240	BSW
75	185/75R14	89	T	620AB	5J	4 1/2J;5 1/2J	1279	580	36	250	12	9.2	25.0	634	7.2	184	BSW
	195/75R14	92	T	620AB	5 1/2J	5J;6J	1389	630	36	250	12	9.3	25.5	648	7.7	196	BSW
	205/75R14	95	T	620AB	5 1/2J	5J;6J	1521	690	36	250	12	9.4	26.1	664	8.0	203	BSW
	205/75R15	97	T	620AB	5 1/2J	5J;6J	1609	730	36	250	12	9.4	27.1	689	8.0	203	BSW
	215/75R15	100	T	620AB	6J	5 1/2J;6 1/2J;7J	1764	800	36	250	12	9.5	27.7	703	8.5	216	BSW
	225/75R15	102	T	620AB	6J	6 1/2J;7J	1874	850	36	250	12	9.6	28.3	719	8.8	223	BSW
	235/75R15	105	T	620AB	6 1/2J	6J;7J	2039	925	36	250	12	9.7	28.9	733	9.3	235	BSW
80	145/80R12	74	T	620AB	4.00B	3.50B;4.50B	827	375	35	240	11	8.5	21.1	537	5.7	145	BSW

LI Load Index    SR Speed Rating    BSW Black Side Wall    WW White Wall

PERFORMANCE ALL-SEASON

60000 MILE Limited Warranty

# CHAMPIRO 128

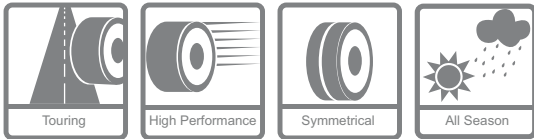

13 – 17 Inch      Speed Rating: H - V  
50 – 65 Series      UTQG: 260AA - 460AA

### Features

- Dynamic pattern with four wide straight grooves
- Circumferential central rib and interlocked blocks and lugs
- Optimized casing profile and variable pitch
- Extended shoulder grooves

### Benefits

- ▶ Effective water drainage for superb wet performance
- ▶ Enhances handling, traction, and braking
- ▶ Quiet and comfortable driving
- ▶ Provides enhanced cornering



Refer to pages 28 & 29 for details



# PERFORMANCE ALL-SEASON CHAMPIRO I28



## Size Range

AR	Tire Size	LI	SR	UTQG	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
50	205/50R16	87	V	260AA	6 1/2J	6J;7J	1202	545	44	300	10	8.0	24.1	612	8.4	214	BSW
	195/55R15	85	H	460AA	6J	5 1/2J;6 1/2J	1135	515	44	300	10	7.9	23.4	595	7.9	201	BSW
55	195/55R15	85	V	260AA	6J	5 1/2J;6 1/2J	1135	515	44	300	10	7.9	23.4	595	7.9	201	BSW
	205/55R16	91	V	260AA	6 1/2J	6J;7J	1356	615	44	300	10	8.0	24.9	632	8.4	214	BSW
	215/55R16	93	V	260AA	7J	6 1/2J;7 1/2J	1433	650	44	300	10	8.1	25.3	642	8.9	225	BSW
	225/55R17	97	V	260AA	7J	6 1/2J;7 1/2J	1521	690	44	300	10	8.1	26.8	690	9.2	233	BSW
60	185/60R14	82	H	460AA	5 1/2J	5J;6J	1047	475	36	250	10	8.1	22.8	578	7.4	189	BSW
	195/60R14	86	H	460AA	6J	5 1/2J;6 1/2J	1168	530	36	250	10	8.1	23.2	590	7.9	201	BSW
	185/60R15	84	H	460AA	5 1/2J	5J;6J	1102	500	36	250	10	8.1	23.7	603	7.4	189	BSW
	195/60R15	88	H	460AA	6J	5 1/2J;6 1/2J	1235	560	36	250	10	8.1	24.2	615	7.9	201	BSW
	205/60R15	91	H	460AA	6J	5 1/2J;6 1/2J	1356	615	36	250	11	8.2	24.7	627	8.2	209	BSW
	205/60R16	92	H	460AA	6J	5 1/2J;6 1/2J	1389	630	36	250	11	8.2	25.7	652	8.2	209	BSW
	215/60R16	95	H	460AA	6 1/2J	6J;7J	1521	690	36	250	11	8.3	26.1	664	8.7	221	BSW
	225/60R16	98	H	460AA	6 1/2J	6J;7J	1653	750	36	250	11	8.4	26.6	676	9.0	228	BSW
	235/60R16	100	H	460AA	7J	6 1/2J;7 1/2J	1764	800	36	250	11	8.5	27.1	688	9.4	240	BSW
65	165/65R13	77	T	460AA	5.00B	5J;5.50B	908	412	36	250	10	7.9	21.4	544	6.7	170	BSW
	165/65R14	79	T	460AA	5J	5.00B;5 1/2J	963	437	36	250	10	7.9	22.4	570	6.7	170	BSW
	175/65R14	82	H	460AA	5J	5 1/2J;6J	1047	475	36	250	10	8.0	23.0	584	7.0	177	BSW
	175/65R14	82	T	460AA	5J	5 1/2J;6J	1047	475	36	250	10	8.0	23.0	584	7.0	177	BSW
	185/65R14	86	H	460AA	5 1/2J	5J;6J	1168	530	36	250	10	8.1	23.5	596	7.4	189	BSW
	195/65R14	89	H	460AA	6J	5 1/2J;6 1/2J	1279	580	36	250	10	8.1	24.0	610	7.9	201	BSW
	185/65R15	88	H	460AA	5 1/2J	5J;6J	1235	560	44	300	10	8.1	24.4	621	7.4	189	BSW
	195/65R15	91	H	460AA	6J	5 1/2J;6 1/2J	1356	615	36	250	10	8.1	25.0	635	7.9	201	BSW
	205/65R15	94	H	460AA	6J	5 1/2J;6 1/2J	1477	670	36	250	11	8.2	25.5	647	8.2	209	BSW
	215/65R15	96	H	460AA	6 1/2J	6J;7J	1565	710	36	250	11	8.3	26.0	661	8.7	221	BSW

LI Load Index    SR Speed Rating    BSW Black Side Wall




## CHAMPIRO 60/65


### Features


- High tread rigidity
- Low rolling resistance
- Double center ribs

### Benefits

- ▶ Smooth quiet ride
- ▶ Improved fuel economy
- ▶ Steady ride


 14 – 15 Inch

 Speed Rating: H

 60 – 65 Series

UTQG: 360AA


AR	Size	LI	SR	UTQG
60	185/60R14	82	H	360AA
	195/60R14	86	H	360AA
	195/60R15	88	H	360AA
	205/60R15	91	H	360AA
65	175/65R14	82	H	360AA
	185/65R14	86	H	360AA
	195/65R14	89	H	360AA
	195/65R15	91	H	360AA
	205/65R15	94	H	360AA



## CHAMPIRO 70

 13 – 14 Inch

 Speed Rating: S - H

 70 Series

UTQG: 340AB - 360AA

AR	Size	LI	S/R	UTQG
70	165/70R13	83	S	340AB
	175/70R13	82	H	340AA
	185/70R13	86	H	340AA
	185/70R14	88	H	360AA
	195/70R14	91	H	360AA
	205/70R14	95	H	360AA

### Features

- Five circumferential ribs with central continuous rib
- Classical pattern with multiple blocks
- Wide circumferential grooves and wide slit grooves
- Variable pitch pattern

### Benefits

- ▶ Excellent handling and maneuverability
- ▶ Excellent traction and long tread life
- ▶ Effective water evacuation for excellent wet grip
- ▶ Smooth and quiet ride

\* Refer to page 28 for warranty details



# CHAMPIRO 75

## Features

Four wide main grooves and open shoulders

Multiple interconnecting sipes in central ribs

Wide tread and wide slit grooves

14 – 15 Inch

Speed Rating: S

75 Series

UTQG: 460AB

## Benefits


▶ Effective water evacuation and excellent wet traction

▶ Superior traction and handling

▶ Excellent handling and maneuverability

AR	Tire Size	LI	SR	UTQG
75	P185/75R14 WW	89	S	460AB
	P195/75R14 WW	92	S	460AB
	P205/75R14 WW	95	S	460AB
	P205/75R15 WW	97	S	460AB
	P215/75R15 WW	100	S	460AB
	P225/75R15 WW	102	S	460AB
	P225/75R15 OWL	102	S	460AB
	P235/75R15 WW	105	S	460AB
P235/75R15 OWL	105	S	460AB	

WW White Wall    OWL Outlined White Letter



# WINGRO

14 – 16 Inch

Speed Rating: H

60 - 70 Series

UTQG: 360AA - 460AA

AR	Tire Size	LI	SR	UTQG
60	225/60R16	98	H	460AA
	235/60R16	100	H	460AA
65	215/65R15	100	H	460AA
70	175/70R14	84	H	360AA
	205/70R15 WW	96	H	360AA
	215/70R15 WW	98	H	360AA

WW White Wall

## Features

Two circumferential block ribs with central continuous rib

Modern pattern combining blocks and lugs

See-through design and smooth wide circumferential grooves

Variable pitch pattern

## Benefits

▶ Excellent handling and maneuverability

▶ Delivers excellent traction and long tread life

▶ Effective water evacuation for excellent wet traction and braking

▶ Superior comfort and quiet ride

\* Refer to page 28 for warranty details



ULTRA HIGH  
PERFORMANCE

SUV

# CHAMPIRO 528



-  20 - 22 Inch
-  Speed Rating: V
-  35 - 55 Series
- UTQG:300AA

### Features

Unique and dynamic tread design with progressive elements

Streamlined high-angle grooves

Wide casing profile and variable pitch design

### Benefits

- ▶ Outstanding handling stability
- ▶ Efficient water dispersion at high speeds and wet traction
- ▶ Comfortable and quiet performance



Refer to page 28 for warranty details







# CHAMPIRO 528


## Size Range


AR	Tire Size	LI	SR	UTQG	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
35	265/35R22	102	V	300AA	9 1/2J	9J;10J	1874	850	49	340	11	8.3	25.4	644	10.7	271	BSW
40	305/40R22	114	V	300AA	11J	10 1/2J;11 1/2J	2601	1180	49	340	11	8.7	31.6	803	12.3	313	BSW
45	275/45R20	110	V	300AA	9J	8 1/2J;9 1/2J	2337	1060	49	340	11	8.4	29.8	756	10.7	273	BSW
	285/45R22	114	V	300AA	9 1/2J	9J;10J;11J	2601	1180	49	340	11	8.5	32.1	815	11.2	285	BSW
	305/45R22	118	V	300AA	10J	9 1/2J;11J	2910	1320	49	340	11	8.7	32.8	833	12.0	305	BSW
50	285/50R20	116	V	300AA	9J	8 1/2J; 9 1/2J;10J	2756	1250	49	340	11	8.5	31.3	794	11.7	297	BSW
	295/50R20	118	V	300AA	9 1/2J	9J;10J;10 1/2J	2910	1320	49	340	11	8.6	31.7	804	12.2	309	BSW
55	275/55R20	117	V	300AA	8 1/2J	8J;9J	2833	1285	49	340	11	8.6	31.9	810	11.2	284	BSW


LI Load Index    SR Speed Rating    BSW Black Side Wall

**A**  Wide road contact tread provides excellent grip, maneuverability and braking

**C**  Circumferential central rib for high speed stability and control

**B**  Streamline pattern and dual circumferential grooves for ultra-efficient water evacuation and wet traction

**D**  Robust shoulder pattern design provides tread stability, efficient response and control at high speed cornering

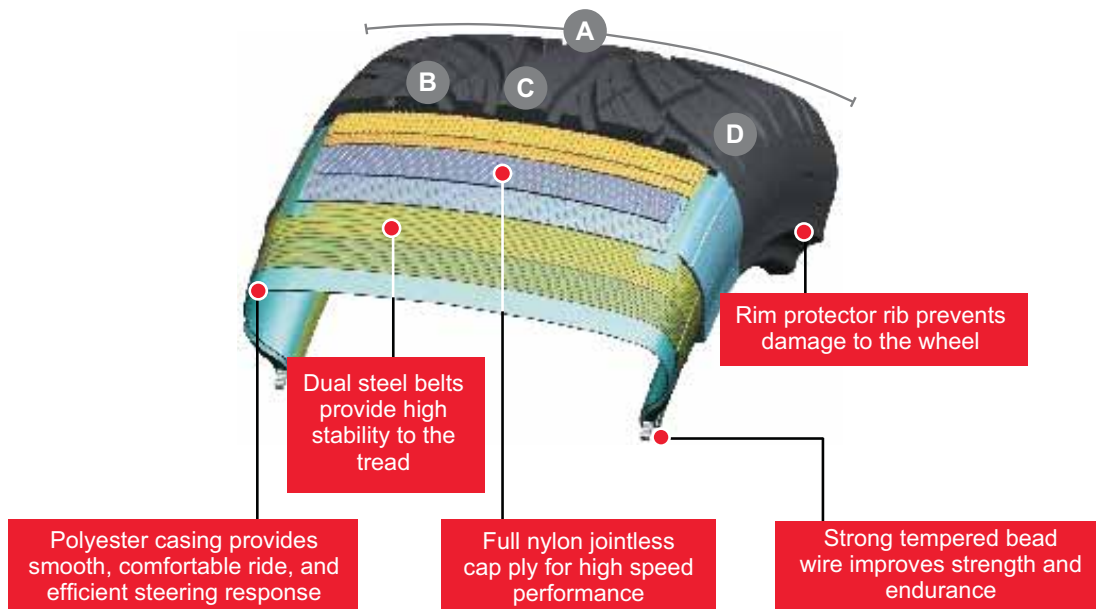

# ALL-SEASON HIGHWAY LIGHT TRUCK & SUV



## SAVERO HT PLUS



Highway Terrain



Symmetrical



All Season



15 - 18 Inch



Speed Rating: R - T



60 - 85 Series



### Features

Modern "S" shape tread pattern design

Four circumferential grooves and open shoulder slots

Special tread compound and wide shoulder slots

### Benefits

▶ Superb handling and smooth quiet performance

▶ Prevents aquaplaning and provide excellent wet performance

▶ Enhances tread life and consistent wet and dry traction



Refer to page 28 for warranty details



**ALL-SEASON HIGHWAY LIGHT TRUCK & SUV**



**SAVERO HT PLUS**

**Size Range**

AR	Tire Size	LI	SR	UTQG/ LR	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side wall
							lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
60	P275/60R17	110	T	460AB	8J	7 1/2J;8 1/2J;9J	2337	1060	35	240	13	10.3	30.0	762	11.0	279	OWL
	P265/60R18	109	T	460AB	8J	7 1/2J;8 1/2J;9J; 9 1/2J	2271	1030	44	300	13	10.2	30.5	775	10.4	265	BSW
	P275/60R20	114	S	460AB	8J	7 1/2J;8 1/2J; 9J;9 1/2J	2601	1180	44	300	13	10.3	33.0	838	10.8	275	BSW
65	P235/65R17	103	T	460AB	7J	6 1/2J;7 1/2J	1984	900	36	250	13	10.3	29.1	738	9.4	240	BSW
	P245/65R17	105	T	460AB	7J	7 1/2J;8J;8 1/2J	2039	925	35	240	13	10.3	28.4	750	9.0	248	BSW
	P265/65R17	110	T	460AB	8J	7 1/2J;8 1/2J	2392	1085	35	240	13	10.3	30.6	776	9.8	272	OWL
	P235/65R18	104	T	460AB	7J	6 1/2J;7 1/2; 8J; 8 1/2J	1984	900	44	300	13	10.3	30.0	763	9.3	235	OWL
70	P215/70R16	99	H	460AA	6 1/2J	6J;7J	1709	775	35	240	13	10.3	30.6	708	9.8	221	BSW
	P225/70R16	101	T	460AB	6 1/2J	6J;7J	1819	825	35	240	13	10.3	28.9	722	9.3	228	OWL
	P235/70R16	104	T	460AB	7J	6 1/2J;7 1/2J	1984	900	35	240	13	10.3	29.0	736	9.3	240	OWL
	P245/70R16	106	T	460AB	7J	7 1/2J;8J	2094	950	35	240	13	10.3	29.3	750	8.8	248	OWL
	P255/70R16	109	T	460AB	7 1/2J	7J;8J	2271	1030	35	240	13	10.3	29.3	764	9.8	260	OWL
	P265/70R16	111	T	460AB	8J	7 1/2J;8 1/2J	2403	1090	35	240	13	10.3	31.7	778	10.5	272	OWL
	P235/70R17	108	S	460AB	7J	6J;6 1/2J; 7 1/2J ;8J	2205	1000	50	340	13	10.3	30.0	762	9.3	235	OWL
	P245/70R17	108	T	460AB	7J	6 1/2J;7 1/2J	2205	1000	35	240	13	10.3	31.7	776	9.3	248	OWL
	P265/70R17	113	T	460AB	8J	7 1/2J;8 1/2J	2535	1150	35	240	13	10.3	31.7	804	9.8	272	OWL
75	P235/75R15	105	T	460AB	6 1/2J	6J;7J	2028	920	35	240	13	10.3	28.9	733	9.3	235	OWL
	P235/75R16	106	T	460AB	6 1/2J	6J;7J	2094	950	35	240	13	10.3	29.8	758	9.3	235	BSW
	P245/75R16	109	T	460AB	7J	6 1/2J;7 1/2J	2271	1030	35	240	13	10.3	30.5	774	9.3	248	OWL
	P265/75R16	114	T	460AB	7 1/2J	7J;8J	2601	1180	35	240	13	10.3	31.7	804	10.5	267	OWL
70	LT30X9.50R15	104	R	C	7 1/2J	7J;8J;8 1/2J	1985	900	50	350	16	12.7	29.5	750	9.8	248	OWL
	LT31X10.50R15	109	R	C	8 1/2J	7 1/2J;8J;9J	2270	1030	51	350	16	12.7	30.7	781	10.6	268	OWL
70	LT245/70R17	119/ 116	R	E	7J	6 1/2J;7 1/2J	3000/ 2755	1360/ 1250	80	550	15	11.9	30.6	776	9.3	248	BSW
	LT265/70R17	121/ 118	R	E	8J	7 1/2J;8 1/2J	3195/ 2910	1450/ 1320	80	550	15	11.9	31.7	804	9.8	272	OWL
75	LT235/75R15	104/ 101	R	C	6 1/2J	6JK;6J;7J	1985/ 1820	900/ 825	50	350	15	11.9	29.0	737	9.3	235	OWL
	LT225/75R16	115/ 112	R	E	6J	6K;6 1/2K; 6 1/2L; 6 1/2J	2680/ 2470	1215/ 1120	80	550	15	11.9	29.3	744	8.8	223	BSW
	LT245/75R16	120/ 116	R	E	7J	6 1/2K;6 1/2L; 6 1/2J;7 1/2J	3042/ 2780	1380/ 1260	80	550	15	11.9	30.5	774	9.3	248	OWL
	LT265/75R16	119/ 116	R	D	7 1/2J	7K;7L;7J;8L;8J	3000/ 2755	1360/ 1250	65	450	15	11.9	31.7	804	10.5	267	OWL
85	LT235/85R16	120/ 116	R	E	6 1/2J	6J;6K;6L; 6 1/2L;7J;7K;7L	3042/ 2778	1380/ 1260	80	550	15	11.9	31.7	806	9.3	235	BSW

LI Load Index    SR Speed Rating    LR Load Range    OWL Outlined White Letter    BSW Black Side Wall



# ALL TERRAIN LIGHT TRUCK AND SUV

## SAVERO A/T PLUS



All Terrain



Symmetrical



All Season



15 - 17 Inch



Speed Rating: S - H



60 - 75 Series

UTQG: 460AB

### Features

Special block tread design with multiple sipes

Wide tread pattern with deep solid blocks and lugs

Open shoulder design with wide grooves

### Benefits

▶ Extra off road traction

▶ Delivers superior handling and extended tread life

▶ Minimizes aquaplaning with enhanced wet grip performance



Refer to page 28 for warranty details



**ALL TERRAIN LIGHT TRUCK AND SUV**

**SAVERO A/T PLUS**



**Size Range**


AR	Tire Size	LI	SR	UTQG	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side wall
							lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
<b>60</b>	265/60R17	108	T	460AB	8.0	7.5 - 9.5	2205	1000	44	300	14	11.2	29.5	750	10.7	272	BSW
<b>65</b>	265/65R17	112	T	460AB	8.0	7.5 - 9.5	2469	1120	44	300	14	11.2	30.6	776	10.7	272	BSW
	275/65R17	115	H	460AB	8.0	7.5 - 9.5	2678	1215	44	300	14	11.2	31.1	790	11.0	279	BSW
<b>70</b>	205/70R15	96	T	460AB	6.0	5.0 - 7.0	1565	710	44	300	13	10.2	26.3	669	8.2	209	BSW
	235/70R15	103	S	460AB	7.0	6.0 - 8.0	1929	875	44	300	13	10.2	28.0	711	9.4	240	BSW
	265/70R15	112	T	460AB	8.0	7.0 - 9.0	2469	1120	44	300	14	11.2	29.6	753	10.7	272	BSW
	245/70R16	107	T	460AB	7.0	6.5 - 8.0	2150	975	44	300	14	11.2	29.7	754	9.8	248	BSW
	265/70R16	112	T	460AB	8.0	7.0 - 9.0	2469	1120	44	300	15	11.6	30.6	778	10.7	272	BSW
	275/70R16	114	T	460AB	8.0	7.0 - 9.0	2601	1180	44	300	15	11.6	31.2	792	10.9	276	OWL
<b>75</b>	225/75R15	102	T	460AB	6.0	6.0 - 7.5	1874	850	44	300	14	10.8	28.4	722	8.8	223	BSW
	235/75R15	105	T	460AB	6.5	6.0 - 8.0	2038	925	44	300	14	11.2	28.9	733	9.3	235	BSW
	225/75R16	104	T	460AB	6.0	6.0 - 7.5	1984	900	44	300	14	10.8	29.4	747	9.0	228	BSW
	245/75R16	111	T	460AB	7.0	6.5 - 8.0	2403	1090	44	300	14	11.2	30.5	774	9.8	248	BSW
	265/75R16	116	T	460AB	7.5	7.0 - 9.0	2755	1250	44	300	16	12.2	31.7	804	10.5	267	BSW

LI Load Index    SR Speed Rating    LR Load Range    BSW Black Side Wall    OWL Outlined White Letter

# ALL TERRAIN LIGHT TRUCK AND SUV



## ADVENTURO A/T II



- 15 – 18 Inch
- Speed Rating: S - T
- 65 – 85 Series
- UTQG: 400AB

### Features

Unique tread design with continuous central block

Open shoulder grooves and wide lugs

Full nylon cap ply

Balanced void ratio

### Benefits

▶ Excellent handling stability

▶ Superior all-surface traction for all weather conditions

▶ Improves stability and handling

▶ Resistance to aquaplaning and consistent wet traction



Refer to page 28 for warranty details



# ALL TERRAIN LIGHT TRUCK & SUV


## ADVENTURO A/T II



### Size Range

AR	Tire Size	LI	SR	UTQG/ LR	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
<b>65</b>	P275/65R18	114	T	400AB	8J	7 1/2J;8 1/2J; 9J;9 1/2J	2601	1180	44	300	13	10.2	32.1	815	11.0	279	OWL
<b>70</b>	P255/70R17	110	S	400AB	7 1/2J	6 1/2J;7J;8J; 8 1/2J	2337	1060	44	300	13	10.2	31.1	790	10.2	260	OWL
	LT31X10.50R15	109	S	C	8 1/2J	7 1/2J;8J;9J	2270	1030	51	350	16	12.6	30.7	781	10.5	267	OWL
<b>70</b>	LT305/70R16	124/ 121	S	E	9J	8 1/2J;9 1/2J	3525/ 3195	1600/ 1450	65	450	17	13.5	33.1	840	12.0	305	OWL
	LT235/75R15	104/ 101	S	C	6 1/2J	6JK;6J;7J	1985/ 1820	900/ 825	51	350	15	12.1	29.1	739	9.3	235	OWL
	LT215/75R16	110/ 108	S	D	6J	5 1/2J;6 1/2J	2335/ 2205	1060/ 1000	65	450	15	11.9	28.7	728	8.5	215	OWL
<b>75</b>	LT225/75R16	115/ 112	S	E	6J	6K;6 1/2K; 6 1/2L;6 1/2J	2680/ 2470	1215/ 1120	80	550	17	13.1	29.3	744	8.9	225	OWL
	LT245/75R16	120/ 116	S	E	7J	6 1/2K;6 1/2L; 6 1/2J;7 1/2J	3042/ 2778	1380/ 1260	80	550	17	13.1	30.7	780	9.6	245	OWL
<b>85</b>	LT235/85R16	120/ 116	S	E	6 1/2J	6J;6K;6L; 6 1/2L;7J;7K;7L	3042/ 2778	1380/ 1260	80	550	17	13.1	31.7	806	9.3	235	OWL

LI Load Index    SR Speed Rating    LR Load Range    OWL Outlined White Letter

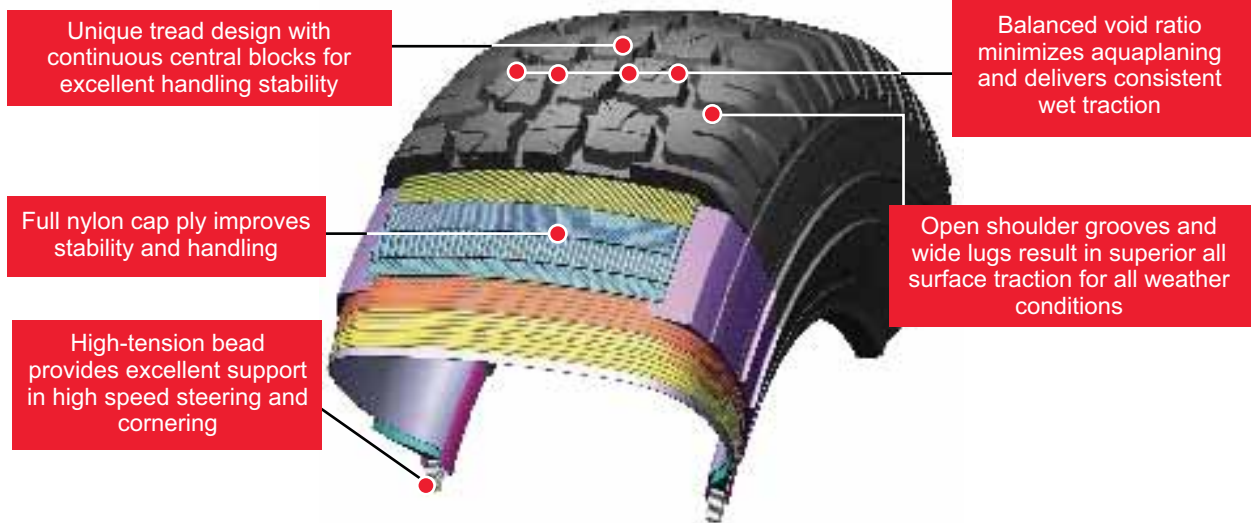

# MUD TERRAIN LIGHT TRUCK & SUV



## ADVENTURO M/T



- 15 – 16 Inch
- Speed Rating: Q - S
- 70 – 85 Series

### Features

- Aggressive pattern design
- High void ratio and pyramidal shaped tread elements
- Special casing profile and solid shoulder pattern
- Reinforced casing construction

### Benefits

- ▶ Outstanding traction in all weather conditions
- ▶ Excellent resistance to aquaplaning and self-cleaning capacity
- ▶ Enhanced traction and cornering
- ▶ Superior overall resistance to damage



Refer to page 28 for warranty details



# MUD TERRAIN LIGHT TRUCK & SUV

## ADVENTURO M/T



### Size Range

AR	Tire Size	LI	SR	LR	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
	LT31X10.50R15	109	Q	C	8 1/2J	7 1/2J;8J;9J	2270	1030	51	350	18	14.6	30.7	781	10.6	268	OWL
	LT33X12.50R15	108	Q	C	10J	8 1/2J;9J;11J	2205	1000	36	250	18	14.6	32.8	832	12.5	318	OWL
<b>70</b>	LT305/70R16	118/115	Q	D	9J	8 1/2J;9 1/2J	2910/2680	1320/1215	51	350	18	14.6	33.1	840	12.2	311	OWL
<b>75</b>	LT235/75R15	104/101	S	C	6 1/2J	6JK;6J;7J	1985/1820	900/825	51	350	18	14.6	29.1	739	9.3	235	OWL
	LT245/75R16	120/116	Q	E	7J	6 1/2K;6 1/2L; 6 1/2J;7 1/2J	3042/2778	1380/1260	80	550	18	14.6	30.7	780	9.8	248	OWL
	LT265/75R16	123/120	Q	E	7 1/2J	7K;7L;7J;8L;8J	3415/3085	1550/1400	80	550	18	14.6	31.9	810	10.5	267	OWL
	LT285/75R16	122/119	Q	D	8J	7 1/2J;8LB; 8KB;8 1/2J	3305/3000	1500/1360	65	450	18	14.6	33.1	840	11.3	286	OWL
<b>85</b>	LT235/85R16	120/116	Q	E	6 1/2J	6J;6K;6L; 6 1/2L;7J;7K;7L	3042/2778	1380/1260	80	550	18	14.6	32.0	812	9.3	235	OWL

LI Load Index    SR Speed Rating    LR Load Range    OWL Outlined White Letter

# PREMIUM STUDDABLE WINTER

## CHAMPIRO ICEPRO



Comfort



Studdable



Directional



Winter



### Studdable

14 - 18 Inch    Speed Rating: Q - T

55 - 75 Series

### Features

New innovative studdable design

Specially designed stud distribution

Lateral groove pattern design

New Silica compound

### Benefits

▶ Reliable in extreme weather conditions

▶ Enhances grip and reduces noise levels

▶ Effectively removes slush and ice from the contact area

▶ Enhances ice performance and snow traction



Refer to page 28 for warranty details

PREMIUM STUDDABLE WINTER

# CHAMPIRO ICEPRO



## PCR Size Range

AR	Tire Size	LI	SR	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
						lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
55	205/55R16 XL	94	T	6 1/2J	6J;7J	1356	615	44	300	12	9.7	24.9	632	8.1	205	BSW
	185/60R15	84	T	5 1/2J	5J;6J	1102	500	44	300	12	9.7	23.7	603	7.3	185	BSW
	195/60R15	88	T	6J	5 1/2J;6 1/2J;7J	1235	560	44	300	12	9.7	24.2	615	7.7	195	BSW
	205/60R16 XL	96	T	6J	5 1/2J;6 1/2J;	1389	630	44	300	12	9.7	25.7	652	8.1	205	BSW
60	215/60R16	95	T	6 1/2J	5 1/2J;6J;7J	1521	690	44	300	12	9.7	26.1	664	8.5	215	BSW
	225/60R16	98	T	6 1/2J	6J;7J;7 1/2J	1653	750	44	300	12	9.7	26.6	676	8.9	225	BSW
	215/60R17	96	T	6 1/2J	5 1/2J;6J;7J	1565	710	44	300	13	10.2	27.2	690	8.5	215	BSW
	225/60R17	99	T	6 1/2J	6J;7J;7 1/2J	1708	775	44	300	13	10.2	27.6	702	8.9	225	BSW
65	175/65R14 XL	86	T	5J	5.00B;5 1/2J;6J	1047	475	44	300	12	9.2	22.9	584	6.9	175	BSW
	185/65R14 XL	90	T	5 1/2J	5J;6J;6 1/2J	1168	530	44	300	12	9.7	23.5	596	7.3	185	BSW
	185/65R15 XL	92	T	5 1/2J	5J;6J	1235	560	44	300	12	9.7	24.4	621	7.3	185	BSW
	195/65R15 XL	95	T	6J	5 1/2J;6 1/2J;7J	1356	615	44	300	12	9.7	25.0	635	7.7	195	BSW
	205/65R15	94	T	6J	5 1/2J;6 1/2J;7J	1477	670	44	300	12	9.7	25.5	647	8.1	205	BSW
215/65R16 XL	102	T	6 1/2J	6J;7J	1653	750	44	300	12	9.7	27.0	686	8.5	215	BSW	
70	205/70R15	96	T	6J	5 1/2J;6 1/2J;7J	1565	710	44	300	12	9.7	26.3	669	8.1	205	BSW

## SUV Size Range

60	245/60R18	105	T	7J	7 1/2J;8J; 8 1/2J	2039	925	44	300	13	10.2	29.6	751	9.8	248	BSW
65	275/65R18	116	T	8J	7 1/2J;8 1/2J;9J	2756	1250	44	300	13	10.2	32.1	815	11.0	279	BSW
70	215/70R15	98	T	6 1/2J	6J;7J	1653	750	44	300	13	10.2	26.8	681	8.7	220	BSW
	215/70R16	100	T	6 1/2J	6J;7J	1764	800	44	300	13	10.2	27.9	708	8.7	220	BSW
	225/70R16	103	T	6 1/2J	6J;7J	1929	875	44	300	13	10.2	28.4	722	8.9	227	BSW
	235/70R16	106	T	7J	6 1/2J;7 1/2J	2094	950	44	300	13	10.2	28.9	736	9.4	240	BSW
	245/70R17	110	T	7J	6 1/2J;7 1/2J	2337	1060	44	300	13	10.2	30.5	776	9.8	248	BSW
265/70R17	115	T	8J	7 1/2J;8 1/2J	2679	1215	44	300	13	10.2	31.7	804	10.7	272	BSW	

## Light Truck Size Range

65	LT275/65R18	123/120	Q	8J	7 1/2J,8J,8 1/2J,9J	3415/3085	1550/1400	80	550	17	13.5	32.1	815	11.0	279	BSW
70	LT245/70R17	119/116	Q	7J	6 1/2J,7J,7 1/2J,8J	3000/2755	1360/1250	80	550	17	13.5	30.8	782	9.8	248	BSW
	LT265/70R17	121/118	Q	8J	7J,7 1/2J,8J,8 1/2J	3195/2910	1450/1320	80	550	17	13.5	31.9	810	10.7	272	BSW
75	LT225/75R16	115/112	Q	6J	6K,6J,6 1/2K,6 1/2J,7K,7J	2680/2470	1215/1120	80	550	17	13.5	29.5	750	8.8	223	BSW
	LT245/75R16	120/116	Q	7J	6 1/2K,6 1/2J,7J,7K,7 1/2J,8J	3042/2778	1380/1260	80	550	17	13.5	30.8	784	9.5	242	BSW

LI Load Index    SR Speed Rating    BSW Black Side Wall



This Limited Warranty Policy and Procedures applies to any new tire manufactured by GITI Tire (GT Radial, Primewell, Runway or Roadpro) that bears the corresponding D.O.T. serial number.

The eligible tire must be operated under normal service and used on the same vehicle on which they were originally installed according to the vehicle manufacturer's recommendations.

Upon examination by GITI Tire, any eligible tire that becomes unusable for any reason that is within the manufacturer's control (see exclusions in section 1.3 "What it is Not Covered"), within five years from the date of tire manufacture and before wearing down to 2/32 inch (1.6 mm) of the remaining original tread depth, will be replaced with an equivalent new GITI Tire product on the basis set forth in this Limited Warranty.

GITI Tire products adjusted under this Limited Warranty due to a substantiated condition related to materials and/or workmanship up to the first 2/32" of the original tread depth, will be replaced free of charge (Federal Excise Tax included). The cost of mounting and balancing and other service charges, disposal fees, or applicable taxes are payable by the customer.

GITI Tire products adjusted under this Limited Warranty due to a substantiated condition related to materials and/or workmanship that are worn beyond the first 2/32" of the original usable tread will be replaced with an equivalent new GITI Tire product on a pro rated basis. The cost of mounting, balancing, full Federal Excise Tax, and other service charges, disposal fees, or applicable taxes are payable by the customer.

This limited warranty does not apply to tires which become unserviceable due to

- Road hazard injury (e.g., cut, snag, bruise, impact damage or puncture)
- Incorrect mounting of the tire
- Tire/wheel imbalance
- Improper repair
- Misapplication
- Improper maintenance, racing
- Under inflation, over inflation
- Uneven or rapid wear which is caused by mechanical irregularity in the vehicle such as wheel misalignment, (measured tread difference of 2/32" or more across the tread on the same tire)
- Accident, fire, chemical corrosion, tire alteration or vandalism
- Use in commercial applications for tread wear; by this warranty for 5 years
- Flat spotting caused by improper storage or brake lock
- The addition of liquid, solid or gaseous materials other than air, nitrogen or carbon dioxide (for example, water based sealers or balancing substances)
- Ozone or weather cracking
- Tires branded "Blemished" or "BLEM" are not adjustable for appearance conditions
- With the serial number buffed or cut
- Purchased or used outside the United States or Canada
- With less than 2/32nds of an inch remaining tread in any groove
- With a ride complaint that occurs after the first 2/32nds of tread wear
- Damaged through use of any tube or flap



**Eligibility:**

This warranty applies to any new GT Radial MAXTOUR or Champiro 128 brand replacement tire purchased on or after March 1, 2006, used in normal service on the vehicle on which it was originally fitted and in accordance with the maintenance recommendations and safety warnings contained in the vehicle's original owners manual for the life of the original usable tread, or five (5) years from the date of purchase, whichever comes first. At that time, all warranties, express or implied, expire.

**Mileage Warranty**

The following GT brand tread designs are covered by a limited warranty for tread wear as follows:

Tire type	Tire Warranty
MAXTOUR	80,000 Miles or 130,000 Kilometers
CHAMPIRO 128	60,000 Miles or 100,000 Kilometers

Driving habits, driving conditions, road conditions, and vehicle maintenance all play a part in the tread life of a tire. If a tire does not reach the warranted mileage, and the owner of the tire has complied with the terms and conditions of this mileage warranty, GITI Tire (USA), Ltd. will replace the tire as follows:

If the eligible tire wears out (down to 2/32" remaining tread depth), before warranty miles are achieved, as measured on the properly functioning odometer of the vehicle under normal passenger car use, GITI Tire (USA), Ltd. will make an allowance for the difference of the warranted mileage vs. the actual mileage achieved toward the purchase of a comparable new GT Radial MAXTOUR or Champiro 128 tire, prorated on warranted mileage.

The retailer will calculate the replacement allowance by multiplying the percentage of the warranted mileage not received by the retailer's selling price at the time and place of adjustment.

- Tires purchased before March 1, 2006.
- Ozone or weather cracking.
- The addition of liquid, solid or gaseous materials other than air, nitrogen or carbon dioxide (e.g. water based sealers or balancing substances).
- Flat spotting caused by improper storage.
- Use in commercial applications for tread wear claims.
- Uneven or rapid wear which is caused by mechanical irregularity in the vehicle such as wheel misalignment.
- Tires used in commercial application including but not limited to: police, taxi and limousine applications.
- Tire damage of any kind caused by misuse, improper maintenance, overloading, racing, improper inflation, chain damage, high speed spin out(s), or the mechanical condition of the vehicle.
- Vehicles used outside of the Continental United States and Canada.
- Continued use while tire is flat or severely under inflated.
- Tires with serial number cut or buffed. Tires must have Department of Transportation identification numbers.
- Tire damage due to wreck, collision, chemical contamination, fire or vandalism.
- Any GT Radial MAXTOUR or Champiro 128 tire altered to change its appearance after date of purchase
- Tire damage due to improper mounting/tire/wheel imbalance or demounting.
- Any GT Radial MAXTOUR or Champiro 128 tire that becomes unserviceable due to workmanship or material defects covered by the GT Radial Tire Limited Warranty.



This warranty applies to any new GT Radial CHAMPIRO BAX 2, CHAMPIRO 228, MAXTOUR, and CHAMPIRO 128 brand replacement tire purchased on or after March 1, 2006, used in normal service on the vehicle on which it was originally fitted and in accordance with the maintenance recommendations and safety warning contained in the vehicle's original owners manual for the first 12,000 Miles or 12 months from the date of purchase, whichever comes first. At that time, all warranties, express or implied, expire.

If an eligible tire is rendered unserviceable due to a non-repairable road hazard (cut, tear, impact break or puncture) during the first 12,000 Miles of original tread life as measured on the properly functioning odometer of the vehicle or twelve (12) months from the date of purchase, whichever comes first, it will be replaced with a comparable new GT Radial CHAMPIRO BAX 2, CHAMPIRO 228, MAXTOUR, and CHAMPIRO 128 tire, prorated on warranted mileage.

The retailer will calculate the replacement allowance by multiplying the percentage of the warranted mileage not received by the retailer's selling price at the time and place of adjustment.

A comparable new GT Radial CHAMPIRO BAX 2, CHAMPIRO 228, MAXTOUR, and CHAMPIRO 128 tire is a tire of the same line, or in the event that a tire of the same line is not available, a tire of the same basic construction and quality which differs only in sidewall or tread design.

If a higher price tire is accepted as a replacement tire or you wish to upgrade to a more expensive tire at the time of adjustment, you will be responsible for any additional costs of the replacement tire versus the original tire.

- Tires purchased before March 1, 2006.
- Ozone or weather cracking.
- The addition of liquid, solid or gaseous materials other than air, nitrogen or carbon dioxide (e.g. water based sealers or balancing substances).
- Flat spotting caused by improper storage.
- Use in commercial applications for tread wear claims.
- Uneven or rapid wear which is caused by mechanical irregularity in the vehicle such as wheel misalignment.
- Tires used in commercial application including but not limited to: police, taxi and limousine applications.
- Tire damage of any kind caused by misuse, improper maintenance, overloading, racing, improper inflation, chain damage, high speed spin out(s), or the mechanical condition of the vehicle.
- Vehicles used outside the United States (excluding Alaska and Hawaii) and Canada.
- Continued use while tire is flat or severely under inflated.
- Tires with serial number cut or buffed. Tires must have Department of Transportation identification numbers.
- Tire damage due to wreck, collision, chemical contamination, fire or vandalism.
- Any GT Radial CHAMPIRO BAX 2, CHAMPIRO 228, MAXTOUR, and CHAMPIRO 128 tire altered to change its appearance after date of purchase
- Tire damage due to improper mounting/tire/wheel imbalance or demounting.
- Any GT Radial CHAMPIRO BAX 2, CHAMPIRO 228, MAXTOUR, and CHAMPIRO 128 tire that becomes unserviceable due to workmanship or material defects covered by the GT Radial Tire Limited Warranty.

## How Your Roadside Assistance Program Works

Roadside assistance is available 24 hours a day, 365 days a year, anywhere in the United States and Canada, for 2 years from the date of purchase of your GT Radial CHAMPIRO BAX 2, CHAMPIRO 228, MAXTOUR, and CHAMPIRO 128 tires. In the event of a flat tire, you must call the toll-free number below and a qualified service provider will replace the flat tire with your inflated spare. If you do not carry an inflated spare and a tow or other services are necessary, you will be solely responsible for any charges incurred.


Services exclude RV's, fleet vehicles, off-road vehicles, or vehicles off the road (winch-out), trailers, any vehicles in tow, vehicle over one ton capacity, commercial vehicles, vehicles already at a repair facility or any vehicle which at the sole determination of the service provider, is in such condition that service is likely to result in damage to the vehicle. Theft, vandalism and accident related incidents are not covered. Service may not be available in areas where state/provincial providers are exclusively utilized.

To ensure prompt dispatch of service, please have the following information available:

1. Your VIN (Vehicle Identification Number)
2. Description of Vehicle - license plate #, make, model & year
3. Your name and number you are calling from
4. Location of vehicle - street address and/or nearest cross street

For Dispatch Only 1-800-999-9460

# Designations, Load and Speed index

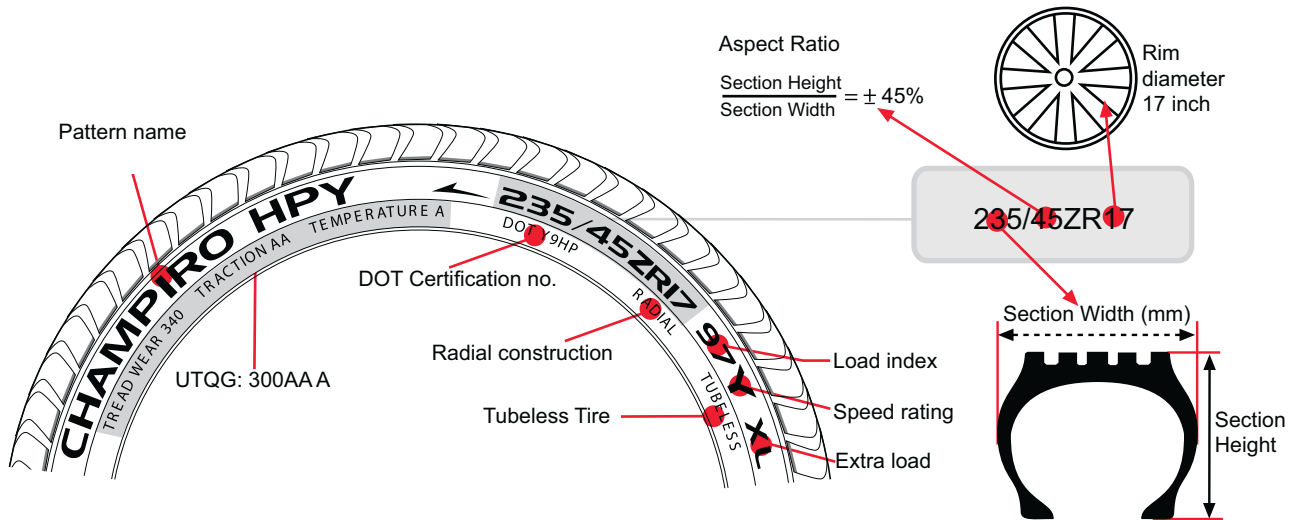

Before fitting, it is essential to check the different markings to ensure that the tires meets the maximum load and speed possibilities and/or the regulations in force.

### SAFETY WARNING

1. Never inflate beyond 40PSI (275kPA) to seat beads.
2. Tires should always be installed by qualified technicians following RMA installation procedures
3. Never mount tires on rims which are damaged or not smooth and clean.
4. Never mount a tire with a torn bead.
5. Never inflate a tire that is lying on the floor or other flat surface.
6. Always use a tire mounting machine with hold-down device or safety cage, or bolt to vehicle axle.

**MOUNT ONLY ON A RIM OF EXACT SAME DIAMETER OF THE TIRE.**

### Speed symbols

SI	Mph
B	31
C	37
D	40
E	43
F	50
G	56
J	62
K	68
L	75
M	81
N	87
P	93
Q	100
R	106
S	113
T	118
U	130
V	150
W	168
X	186

### Load Capacity Index

LI	lbs	LI	lbs	LI	lbs
65	639	92	1389	114	2601
66	661	93	1433	115	2679
67	677	94	1477	116	2756
68	694	95	1521	117	2833
69	716	96	1565	118	2910
70	739	97	1609	119	2998
71	761	98	1653	120	3086
72	783	100	1764	121	3197
73	805	101	1819	122	3307
74	827	102	1874	123	3417
75	852	103	1929	124	3527
76	882	104	1984	125	3658
77	908	105	2039	126	3748
78	937	106	2094	127	3858
85	1135	107	2150	128	3968
86	1168	108	2205	129	4079
87	1201	109	2271	130	4189
88	1235	110	2337	131	4299
89	1279	111	2403	132	4409
90	1323	112	2469	133	4542
91	1356	113	2535	134	4674







**USA**

1-866-488-4737

[gtradial-us.com](http://gtradial-us.com)

**CANADA**

1-888-890-0051

[gtradial-ca.com](http://gtradial-ca.com)

While every care has been taken in the preparation of this tire catalog, GT Radial shall not be held responsible for any inaccuracies therein. All visual representations including photos, drawings, illustrations and renderings portray artist's impressions only and not to be relied upon as statements or representation of facts. All information and specifications are current at the time of publication and are subject to change.